

PLANA

Semi-Automatic

- SPACE SAVING
- NO STRAIN WITH HAND PALLET TRUCK
- NO FORK LENGTH PROBLEMS WITH ELECTRICAL PALLET TRUCK


TECHNICAL DATA

Height	2424 mm
Width	1650 mm
Length	2813 mm
Turntable height	18 mm
Weight	540 kg
Power supply	230 VAC 1PH+N+PE
Power absorption	1 kW

KEY POINTS


Innovation is here, no need for ramps any longer, with a 18mm turntable the space saver has arrived!

A very strong driving system, a 1.500 kg max payload

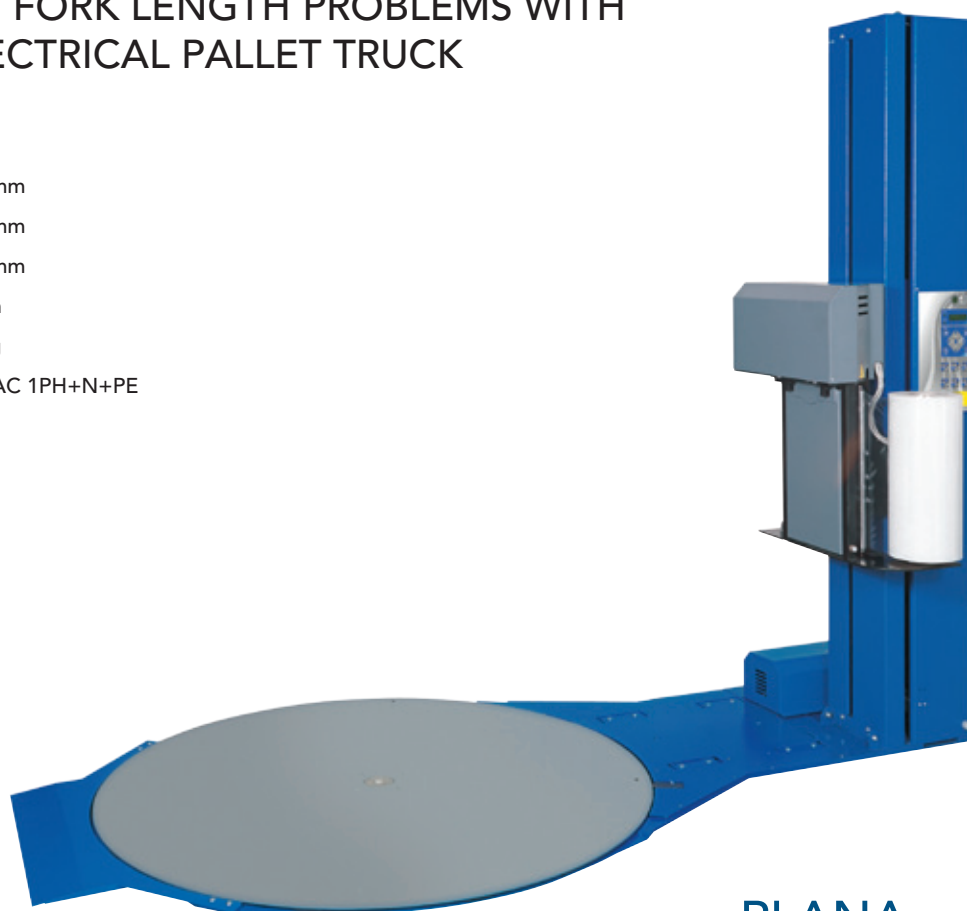



PLANA

Only 18 mm thickness, C-One Plana is the lowest turntable in the world! Thanks to its reduced height, the ramp is only 20 cm long, the turntable loading will be very easy and strain-free, no need to take a run up to pass the ramp, no danger to stumble against the ramp or slip while pushing the load on the ramp with a hand pallet truck. No ramp means space saving too, 1.5 square meters that can be used instead of being occupied by a ramp. If you use an electric pallet truck, you will not have any problem, it doesn't matter how long the forks are, if you use a forklift you will never damage the bottomframe bumping it with the forks, as the bottom frame is so low that forks are always in a higher position.

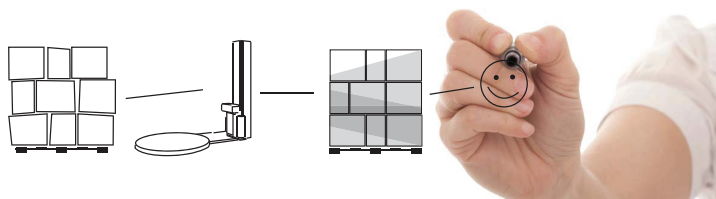

PLANA

Semi-Automatic



PRODUCT SPECIFICATIONS – STANDARD

- Electronic printed circuit board for the management of the cycle
- Frequency controller for carriage speed adjustment
- Frequency controller for turntable speed adjustment
- Loading plate \varnothing 1650 mm
- Maximum height of pallet: 2200 mm
- Maximum size of the pallet: 1200 x 1200 mm
- Electromagnetic brake for the stretching of the film
- Photocell for pallet height detection
- Safety stop at the base of the carriage
- Stop at 0 position
- Power board IP54
- 3 password levels (including lock password)
- Stop at 0 position
- Power board IP54
- 3 password levels (including lock password)
- Adjustable parameters by the control panel without password: cycle selection, bottom laps, top laps, topsheet cycle
- Parameters, rotation speed, carriage ascent speed, carriage descent speed, film tension, starting wrapping height
- 6 working cycles: ascent/descent; topsheet; only ascent; only descent; layers; stack
- Storage of 32 end user programs
- 3 working ways: semimanual, semiautomatic, fixed height
- Strengthening operation
- Acoustic warning at the cycle start and stop
- Autodiagnostic
- Wrapped pallet counter
- Receiver for infrared/radio remote control
- Powder coating
- Braked turntable at the end of the cycle
- 2 years warranty - subject to service agreement

EXTRA OPTIONS

- Top-press
- Adjustable power pre-stretch
- Power pre-stretch with auto cut-off system
- Roping system
- 3000 mm max wrapping height
- Remote control
- Ramp
- Photocell for dark loads
- Clip to tie the film to the turntable
- Mechanical system to brake roll containers
- Safety fences



AAA PACKAGING SUPPLIES

Anything. Anytime. Anywhere

AAA Packaging Supplies Pty Ltd

ACN 130 264 845

15-23 Logistics Street, Keilor Park, Victoria 3042

PO Box 812 Tullamarine 3043 Victoria Australia

sales@aaapackaging.com.au

www.aaapackaging.com.au

Ph : 1300 764 963

Fax : 1300 728 963