



FOR HEAVY DUTY GROUND VEHICLES

(continued)

FEATURES

- The #1 selling wheels chocks in the mining industry
- MC series wheel chocks are approved and being used by Caterpillar and mines worldwide
- Weather-resistant urethane construction
- Resistant to oils, fuels, and solvents
- Meets MSHA specifications

HEAVY DUTY MC3009 SERIES

RECOMMENDED TIRE DIAMETER 46" TO 65" (116.8 CM TO 165.1 CM)

MODEL: MC3009




- Tough urethane construction
- Recessed carrying handle
- Mounting hole for ropes, chains or brackets
- Replaceable rubber anti-slip traction pads with aluminum mounting plates to resist delamination due to corrosion
- Molded-in ANSI Z535.4 compliant proper chocking guidelines
- Safety yellow color




MCSTUD


Top View



Side View



Back View



MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	WEIGHT	COLOR
MC3009	15 in. (38.1 cm)	15.1 in. (38.4 cm)	11 in. (28.0 cm)	14.5 lb. (6.6 kg)	Yellow
MCPAD12X2.5	Replacement traction pad for MC3009 & MC1909			1.5 lb. (.7 kg)	Black
MCSTUD-3/8X1.5	Optional stainless steel studs for snow and ice. Requires 4 per MC3009 and MC1909			.06 lb. (.027 kg) Each	Grey

- For mine support equipment such as lubrication trucks and maintenance vehicles
- For Tire Diameter 46" to 65" (116.8 cm to 165.1 cm)
- Max Gross Vehicle Operating Weight up to 245,000 lbs. or 111,130 kg
- For Payloads up to 70 tons* (63,503 kg) use two MC3009

* Ton is the U.S. standard, equivalent to 2,000 lb. (907 kg)

MC1900 Mounting Bracket for this chock is show below

HEAVY DUTY MC1210 SERIES

RECOMMENDED TIRE DIAMETER 65" TO 95" (165.1 CM TO 241.3 CM)

MODEL: MC1210



- Durable urethane construction
- Oil and chemical resistant
- Recessed carrying handle
- Molded-in "How to Use" guidelines
- High visibility orange color
- Mounting hole for ropes, chains or brackets


Top View



Side View



Back View



MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	WEIGHT	COLOR
MC1210	17 in. (43.2 cm)	14 in. (35.6 cm)	14 in. (35.6 cm)	25 lb. (11.3 kg)	Orange

- For mining and construction haul trucks & support equipment
- For Tire Diameter 65" to 95" (165.1 cm to 241.3 cm)
- Max Gross Vehicle Operating Weight up to 366,000 lbs. or 166,015 kg
- For Payloads up to 100 tons* (90,718 kg) use two MC1210



* Ton is the U.S. standard, equivalent to 2,000 lb. (907 kg)

MC1900 Mounting Bracket for this chock is show below

MOUNTING BRACKET

FOR MC SERIES CHOCKS

MODEL: MC1900

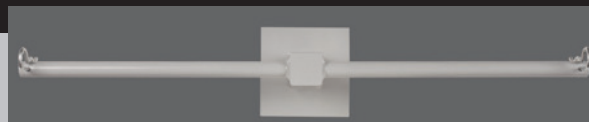

MODEL	DESCRIPTION	SPECIFICATIONS	WEIGHT
MC1900	Universal Dual Mounting Bracket* holds 2 each of MC Series Wheel Chocks. Primer Finish. *Mounting Hardware NOT included.	36" (91.4 cm) Length Bracket Rod with 6" (15.2 cm) Mounting Plate	16 lb. (7.3 kg)