


HEAVY DUTY MC3012 SERIES

RECOMMENDED TIRE DIAMETER 95" TO 142" (241.3 CM TO 360.7 CM)

- Tough urethane construction
- Recessed carrying handle
- Mounting hole for ropes, chains or brackets
- Replaceable rubber anti-slip traction pads with aluminum mounting plates to resist delamination due to corrosion
- Molded-in ANSI Z535.4 compliant proper chocking guidelines
- Safety yellow color

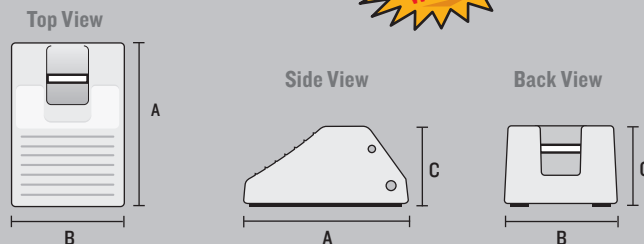

MODEL: MC3012

MC1900 Mounting Bracket for this chock is shown below



MCSTUD

MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	WEIGHT	COLOR
MC3012	21.9 in. (55.7 cm)	14.9 in. (37.9 cm)	10.6 in. (27.0 cm)	23.75 lb. (10.8 kg)	Yellow
CT1912	12.0 in. (30.5 cm)	24.0 in. (61 cm)	49.0 in. (124.5 cm)	35 lb. (15.9 kg)	Grey
MCPAD20.25X2.5	Replacement traction pad for MC3012 & MC1912			2 lb. (5.0 kg)	Black
MCSTUD-3/8X1.5	Optional stainless steel studs for snow and ice. Requires 8 per MC3012 and MC1912			.06 lb. (.027 kg) Each	Grey

- For mine haul trucks and mine support equipment
- For Tire Diameter 95" to 142" (241.3 cm to 360.7 cm)
- Max Gross Vehicle Operating Weight up to 855,000 lbs. or 387,821 kg
- For Payloads up to 255 tons* (231,332 kg) use two MC3012

HEAVY DUTY MC3010 SERIES

RECOMMENDED TIRE DIAMETER 65" TO 105" (165.1 CM TO 266.7 CM)


- Tough urethane construction
- Recessed carrying handle
- Mounting hole for ropes, chains or brackets
- Replaceable rubber anti-slip traction pads with aluminum mounting plates to resist delamination due to corrosion
- Molded-in ANSI Z535.4 compliant proper chocking guidelines
- Safety yellow color



MODEL: MC3010



MCSTUD

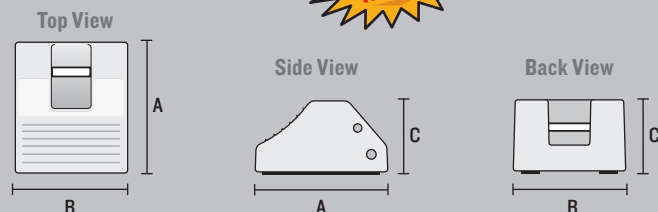

MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	WEIGHT	COLOR
MC3010	17.7 in. (45.0 cm)	15.2 in. (38.7 cm)	10 in. (25.4 cm)	19 lb. (8.62 kg)	Yellow
MCPAD15X.75X2.5	Replacement traction pad for MC3010 & MC1910			2 lb. (5.0 kg)	Black
MCSTUD-3/8X1.5	Optional stainless steel studs for snow and ice. Requires 6 per MC3010 and MC1910			.06 lb. (.027 kg) Each	Grey

- For mining and construction haul trucks and support equipment
- For Tire Diameter 65" to 105" (165.1 cm to 266.7 cm)
- Max Gross Vehicle Operating Weight up to 550,000 lbs. or 249,476 kg
- For Payloads up to 165 tons* (149,685 kg) use two MC3010



MC1900 Mounting Bracket for this chock is shown below

* Ton is the U.S. standard, equivalent to 2,000 lb. (907 kg)

MOUNTING BRACKET

FOR MC SERIES CHOCKS

MODEL: MC1900

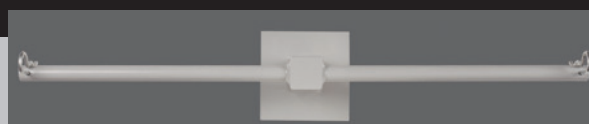

MODEL	DESCRIPTION	SPECIFICATIONS	WEIGHT
MC1900	Universal Dual Mounting Bracket* holds 2 each of MC Series Wheel Chocks. Primer Finish. *Mounting Hardware NOT included.	36" (91.4 cm) Length Bracket Rod with 6" (15.2 cm) Mounting Plate	16 lb. (7.3 kg)