



# FOR HEAVY DUTY GROUND VEHICLES

For wheels with a diameter up to 165"

## FEATURES

- The #1 selling wheel chocks in the mining industry
- MC series wheel chocks are approved and being used by Caterpillar and mines worldwide
- Weather-resistant urethane construction
- Resistant to oils, fuels, and solvents
- Meets MSHA specifications

MONSTER® HEAVY DUTY MC SERIES WHEEL CHOCKS are manufactured with highly durable, lightweight polyurethane construction. With a larger base than our UC or AT models, the MC Series is ideal for use with heavy equipment such as haul trucks, loaders, and cranes. MONSTER® Heavy Duty Wheel Chocks are available in two different model series: MC3000 Series and MC1200 Series.

## HEAVY DUTY MC3000 SERIES

RECOMMENDED TIRE DIAMETER 105" TO 165" (266.7 CM TO 419.1 CM)



MODEL: MC3000


- Tough urethane construction
- Replaceable rubber anti-slip traction pads with aluminum mounting plates to resist delamination due to corrosion
- Molded-in ANSI Z535.4 compliant proper chocking guidelines in English, Spanish and French with color illustrations
- Four side handles and carrying strap on back
- Safety Yellow color



MCSTUD



MODEL: CT2000  
2 Wheel  
Transport Cart

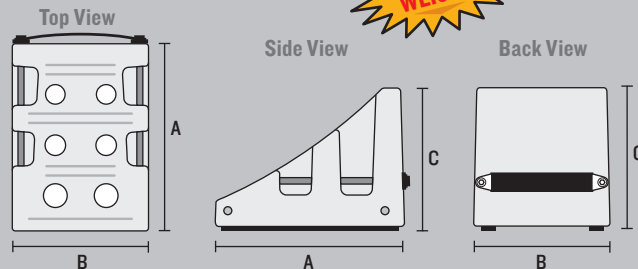

MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	WEIGHT	COLOR
MC3000	30 in. (76.2 cm)	22 in. (55.9 cm)	22 in. (55.9 cm)	70.25 lb. (31.9 kg)	Hi-Vis Yellow
CT2000	12 in. (30.5 cm)	24 in. (61.0 cm)	49 in. (124.5 cm)	33 lb. (15 kg)	Gray
MCPAD28X2.25	Replacement traction pad for MC3000 & MC2000			2.5 lb. (1.1 kg)	Black
MCSTRAP-17	Replacement handle strap for MC3000 & MC2000			.5 lb. (.23 kg)	Black
MCSTUD-3/8X1.5	Optional stainless steel studs for snow and ice. Requires 10 per MC3000 and MC2000			.06 lb. (.027 kg) Each	Grey

For mine haul trucks with tire sizes from 105 in. to 165 in. (266.7 cm to 419.1 cm) dia. and gross vehicle operating weight up to 1,600,000 lbs. (725,748 kg). Maximum payload capacity is 400 tons\*.

## HEAVY DUTY MC3011 SERIES

RECOMMENDED TIRE DIAMETER 95" TO 165" (241.3 CM TO 419.1 CM)


- Tough urethane construction
- Recessed carrying handle
- Mounting hole for ropes, chains or brackets
- Replaceable rubber anti-slip traction pads with aluminum mounting plates to resist delamination due to corrosion
- Molded-in ANSI Z535.4 compliant proper chocking guidelines with color illustrations
- Safety yellow color



MODEL: MC3011



MODEL: CT1911  
2 Wheel  
Transport Cart

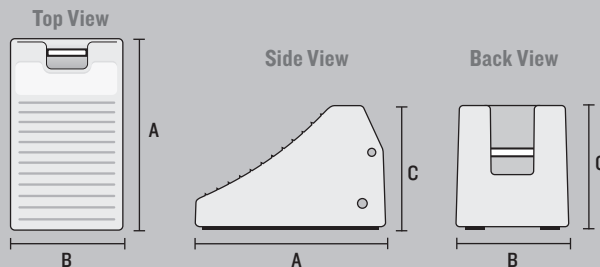

MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	WEIGHT	COLOR
MC3011	24.6 in. (62.5 cm)	14.5 in. (36.9 cm)	16 in. (40.7 cm)	32 lb. (14.5 kg)	Hi-Vis Yellow
CT1911	12 in. (30.5 cm)	24 in. (61.0 cm)	49 in. (124.5 cm)	33 lb. (15 kg)	Gray
MCPAD22.875X2.5	Replacement traction pad for MC3011 and MC1911			2 lb. (.9 kg)	Black
MCSTUD-3/8X1.5	Optional stainless steel studs for snow and ice. Requires 8 per MC3011 and MC1911			.06 lb. (.027 kg) Each	Grey

- For mine haul trucks and mine support equipment
- For Tire Diameter 95" to 165" (241.3 cm to 419.1 cm)
- Use two MC3011 for Gross Vehicle Operating Weight up to 855,000 lbs. (387,821 kg)  
OR for Payloads up to 240 tons\* (217,724 kg)
- Use four MC3011 for Gross Vehicle Operating Weight up to 1,600,000 lbs. (725,748 kg)  
OR for Payloads up to 400 tons\* (362,874 kg)

\* Ton is the U.S. standard, equivalent to 2,000 lb. (907 kg)



MCSTUD

**MC1900 Mounting Bracket for this chock is on page 55**